

2p to 6p with wedge, above 7p
without wedge (including 7p)

N = Number of contacts

DIMENSION

A	NX3.5
B	(N-1)X3.5

Poles	Tolerance
2P-8P	±0.10
9P-16P	±0.20
17P-24P	±0.30

SIGN	DATE	DESCRIPTION	APPROVER
△	8/07'06	Added VDE standard	梁仁松
△	2008.12.02	With flange screw changed from "- slot type to "+/- slot type	Jacke
△	2008.12.02	The temperature changed from -30°C,+105°C to -40°C,+115°C	Jacke
△	2008.12.02	The dimension design changed from 19.1mm to 19.3mm	Jacke


THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Item ① Clamp: Brass(CuZn), Nickel plated
- Item ② Terminal screw: Steel Zinc plating "- slot type
- Item ③ Female contact: PhBz, Tin plated
- Item ④ Terminal (housing): Thermoplastic (UL94V-0)
- Item ⑤ Terminal (cover): Thermoplastic (UL94V-0)
- Item ⑥ With flange screw: Steel M2.5 Zinc plating "+/- slot type Electrical cULus/VDE

- Voltage rating: 300VAC/300VAC
- Current rating: 8A/10A
- Wire range: 1.5mm²
- Solid wire(AWG): 16-28
- Stranded wire(AWG): 16-28
- Torque: 1.7Lb-In./0.2Nm
- Screw: M2
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV/2.5KV
- △ Operating temperature: -40°C to +115°C
- △ Safety approval: cULus VDE

TS xx 1 1 x D xxxx G

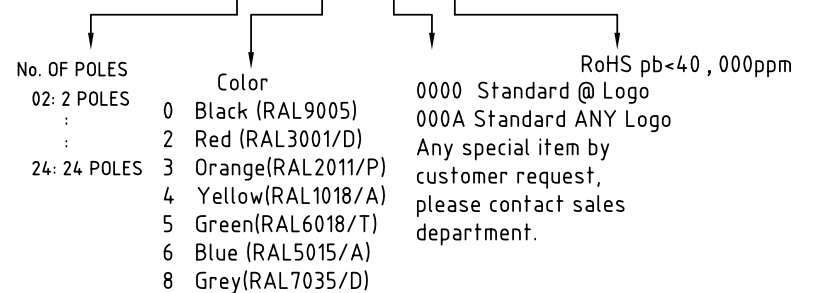

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		TS-3.5mm Series With flange (for latch on back side)					
PART NO.		TSxx11xDxxxxG			DWG NO.		8TS0204
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance	
		Jacke 2008.12.10	Jacke 2008.12.10			X.	±0.50
						UNIT:	mm
						SCALE:	NONE
SHEET: 01/01						REV.:	E
						X.X	±0.30
						X.XX	±0.10
						X°	±1°

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

[TS02115D0000G](#) [TS03115D0000G](#) [TS04115D0000G](#) [TS05115D0000G](#) [TS06115D0000G](#) [TS07115D0000G](#)
[TS08115D0000G](#) [TS09115D0000G](#) [TS10115D0000G](#) [TS11115D0000G](#) [TS12115D0000G](#) [TS13115D0000G](#)
[TS14115D0000G](#) [TS15115D0000G](#) [TS16115D0000G](#) [TS17115D0000G](#) [TS18115D0000G](#) [TS19115D0000G](#)
[TS20115D0000G](#) [TS21115D0000G](#) [TS22115D0000G](#) [TS23115D0000G](#) [TS24115D0000G](#) [TS02118D0000G](#)
[TS04110D0000G](#) [TS10118D0000G](#) [TS08118D0000G](#) [TS09110D0000G](#) [TS03118D0000G](#) [TS05118D0000G](#)
[TS08110D0000G](#) [TS03110D0000G](#) [TS07110D0000G](#) [TS11118D0000G](#) [TS16110D0000G](#) [TS11110D0000G](#)
[TS10110D0000G](#) [TS13118D0000G](#) [TS14110D0000G](#) [TS13110D0000G](#) [TS15118D0000G](#) [TS05110D0000G](#)
[TS06110D0000G](#) [TS15110D0000G](#) [TS18118D0000G](#) [TS21118D0000G](#) [TS22110D0000G](#) [TS24118D0000G](#)
[TS12110D0000G](#) [TS18110D0000G](#) [TS22118D0000G](#) [TS17118D0000G](#) [TS17110D0000G](#) [TS19118D0000G](#)
[TS20110D0000G](#) [TS20118D0000G](#) [TS19110D0000G](#) [TS23118D0000G](#) [TS21110D0000G](#) [TS23110D0000G](#)
[TS02110D0000G](#) [TS04118D0000G](#) [TS06118D0000G](#) [TS07118D0000G](#) [TS12118D0000G](#) [TS09118D0000G](#)
[TS14118D0000G](#) [TS16118D0000G](#) [TS24110D0000G](#)